



IB Series






Make Sensing Easy:

FROM SIMPLE DIFFERENTIATION TO HIGH SPEED,
HIGHLY REPEATABLE DETECTION




A wide variety of applications are possible with the various sensor heads and the highly-functional amplifiers





- High-speed sampling of 80 µs
- High repeatability of 5 µm
- New function: Auto adjustment included


Highly repeatable detection even for transparent targets

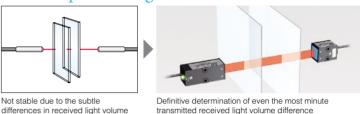

Not influenced by passage position







Regardless of position, the received light volume remains the same

Simple positioning using to the alignment LED

Easy to align the optical axis

As the optical axis of the laser aligns, the flash frequency of the laser transmitter indicator quickens. Even without looking at the amplifier unit, the optimum position can be achieved easily.



If the optical axis is not aligned the LED turns off



When the optical axis begins to align, the flashing frequency of the LFD quickens

100%



High-speed flashing when the optical axis is aligned

Auto adjustment function ON

Maintenance-saving with the Auto adjustment function

Long-term, stable detection even in environments where the device becomes dirty easily

In the IB Series, should the received light volume decrease due to dirt on the front of the sensor head, by using the adjustment input, the new received light volume can be adjusted to compensate. In addition, when the Auto adjustment function recognizes no target in the beam path and the received light volume drops below 90%, the sensor compensates for the light loss automatically. Even when used in environments where the device becomes dirty easily, stable detection and a high degree of maintenance-saving has been made possible by the device automatically correcting itself.

Metal Industry Differentiation of different metal shafts



Plastics Industry
Differentiation of different films



Auto adjustment function OFF

Automatically adjusts the received light volume to the standard value

Factories
Turbidity detection of factory waste water



Specifications

Sensor head



Model		IB-01	IB-05	IB-10	IB-30		
Appearance					Berger Reserved Reser		
Light source		Visible semiconductor laser Wavelength: 660 nm					
	Laser Class	Class 1 (IEC60825-1, FDA (CDRH) Part1040:10 ¹)					
Mounting distance		0 to 2000 mm 0 to 78.74"	0 to 2000 mm 0 to 78.74" 0 to 300 mm 0 to 11.81"				
Measurement range		Ø1 mm Ø0.04" (Installation distance 0 to 300 mm 11.81") Ø1 to 2.5 mm Ø0.04" to 0.10" (Installation distance 300 to 2000 mm 11.81" to 78.74")	5 mm 0.20°	10 mm 0.39*	30 mm 1.18*		
Sampling rate		12,500 times/sec. (80 µs)					
Minimum detectable object ^{2.}		Ø8 µm (Installation distance 0 to 300 mm) Ø8 to 50 µm (Installation distance 300 to 2000 mm 11.81" to 78.74")	Ø0.05 mm 0.002*	Ø0.1 mm 0.004*	Ø0.2 mm 0.008*		
Repeatability ^{3.}		5 μm (distance 0 to 300 mm 11.81")	5 μm	5 μm	10 µm		
Temperature characteristics 4.		±0.2% of F.S./°C	±0.1% of F.S./°C (±5 μm)	±0.1% of F.S./°C (±10 μm)	±0.1% of F.S./°C (±30 μm)		
Operation indicator		Laser emission warning indicator: green LED					
Environmental resistance	Ambient luminance	Incandescent lamp: 5000 lux Solar light: 10000 lux	Incandescent lamp: 5000 lux Solar light: 5000 lux	Incandescent lamp: 10000 lux Solar light: 10000 lux			
	Ambient temperature	0 to 40°C 0 to 104°F (no freezing)	0 to 50°C 0 to 122°F (no freezing)				
	Ambient humidity	35 to 85%RH (no condensation)					
	Vibration	10 to 55 Hz Double amplitude 1.5 mm 0.06° XYZ each axis: 2 hours					
Material	Case	PBT	Zinc die-cast				
	Lens cover	Glass					
	Cable	PVC					
Weight		Approx. 140 g	Approx. 180 g	Approx. 220 g	Approx. 510 g		

- 1. The classification for FDA (CDRH) is implemented based on IEC60825-1 in accordance with the requirements of Laser Notice No.50.
- 1. The dissillation for PDA (Cort) is implicit enter deave of in Ecologica 1 in accordance with the requirements of Leave notice in Voluce.

 2. Value when measuring the target (white diffuse object) at the middle of the transmitter and receiver position, and at the center of the measurement range.

 3. When distance between transmitter and receiver is set to 300 mm 11.811, and light is half-shielded at a position 150 mm 5.911 from receiver.

 Deflection width (±2c) when sampled for 30 seconds with an average number of times set to 64 times.

 4. When distance between transmitter and receiver is set to 100 mm 3.941 and full light is received.

Amplifier unit

Model		IB-1000	IB-1500	IB-1050	IB-1550		
Appearance			10000		3 10000 5 500 5		
Amplifier type		DIN rail mount	Panel mount	DIN rail mount	Panel mount		
Main unit/Expansion unit		Main unit Expansion unit					
Head compatibility		Yes					
Display	Display resolution	0.01%, 0.1%, 1% (switchable)					
	Display range	-99.999 to 99.999, -99.99 to 99.99, -99.9 to 99.9, -99 to 99 (switchable)					
	Digital display method	Dual 7-segment display Upper level:5 red digits Lower level: 5 green digits	Dual 7-segment display Upper level:2-color (green/red) 5 digits Lower level: 5 green digits	Dual 7-segment display Upper level: 5 red digits Lower level: 5 green digits	Dual 7-segment display Upper level: 2-color (green/red) 5 digits Lower level: 5 green digits		
	Operation indicator	Judgment indicator: 2-color (green/red) LED (HI, GO, LO), Bank indicator: Green LED x 4, Laser emission warning indicator: Green LED, Others: Green LED x 8, red LED x 3					
Analog voltage output ^{1.}		± 5 V, 1 to 5 V, 0 to 5 V Output impedance 100Ω		N/A			
Analog current output ^{1.}		4 to 20 mA Maximum load resistance 350Ω		/A			
Control input ^{2.}	Bank switch input Zero-shift input Laser emission stop input Timing input Reset input Adjust input	Non-voltage input					
Control output 3.	Judgment output Check output	Open collector (NPN/PNP switchable, N.O./N.C. switchable)					
Power supply	Power voltage	10 to 30 VDC, including ripple (P-P) 10% Class 2 or LPS		Supplied from main unit			
	Power consumption 4.	1950 mW or less (at 30 V, 65 mA max.)	2100 mW or less (at 30 V, 70 mA max.)	1950 mW or less (at 30 V, 65 mA max.)	2100 mW or less (at 30 V, 70 mA max.)		
Environmental resistance	Ambient temperature	-10 to +50°C 14 to 122°F (No freezing)					
	Ambient humidity	35 to 85% RH (No condensation)					
	Vibration	10 to 55 Hz Double amplitude 1.5 mm 0.06° XYZ each axis: 2 hours					
	Pollution degree	2					
Material		Case/Front panel: polycarbonate, keytop: polyacetal, cable: PVC					
Weight (including supplied items)		Approx. 150 g	Approx. 170 g	Approx. 140 g	Approx. 165 g		

- 1. ± 5 V, 1 to 5 V, 0 to 5 V, or 4 20 mA should be selected.

- 1. ±5 V, 1 to 5 V, 0 to 5 V, or 4 20 mA should be selected.

 2. The four external input wires are assigned with desired inputs.

 Rated no-voltage input: ON voltage 2 V or less, OFF current 0.05 mA or less

 Rated voltage input: Max. input rating 30 V or less, ON voltage 7.5 V or more, OFF current 0.05 mA or less

 3. Rated NPN open collector output: Max. 50 mA/ch (20 mA/ch when expansion units are connected), 30 V or less, residual voltage 1 V or less


 Rated PNP open collector output: Max. 50 mA/ch (20 mA/ch when expansion units are connected), 30 V or less, residual voltage 2 V or less


 4. The power consumption with slave units installed is the total of each amplifier unit's power consumption.


 Example: When using one master unit (IB-1000) with two slave units (IB-1050) (1950 mW X 1) + (1950 mW X 2) = 5850 mW

Dimensions Unit : mm inch

IB Series Sensor head

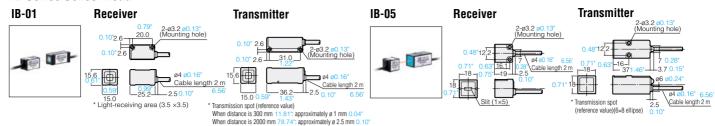

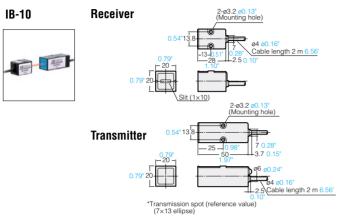


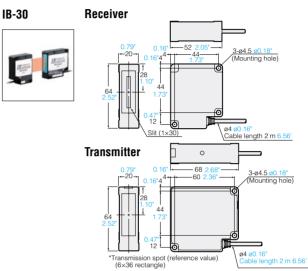


Sensor amplifier (DIN rail mount type)

IB-1000/IB-1050



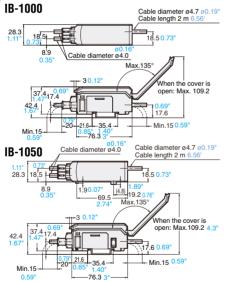

Sensor amplifier (Panel mount type)

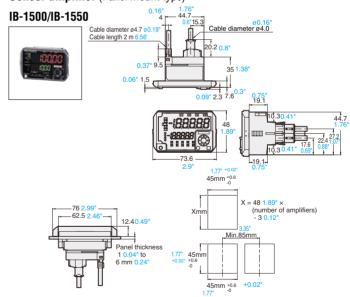





www.kevence.com



CONTACT YOUR NEAREST OFFICE FOR RELEASE STATUS

CA Los Angeles

KEYENCE CORPORATION OF AMERICA

Head Office 500 Park Boulevard, Suite 200, Itasca, IL 60143, U.S.A.

AL Birmingham CA San Jose CO Denver Chicago AR Little Rock CA Cupertino FL Tampa IN Indianapolis

GA Atlanta KY Louisville A lowa MA Boston

MI Detroit MI Grand Rapids MN Minneapolis

MO Kansas City

MO St. Louis NJ Elmwood Park NY Rochester NC Charlotte

NC Raleigh **OH** Cincinnati OH Cleveland OR Portland

PHONE: +1-201-930-0100 FAX: +1-855-539-0123 E-mail: keyence@keyence.com PA Philadelphia TN Nashville PA Pittsburgh TX Austin TX Dallas SC Greenville

TN Knoxville

WI Milwaukee

KEYENCE MEXICO S.A. DE C.V.

PHONE: +52-55-8850-0100 FAX: +52-81-8220-9097 E-mail: keyencemexico@keyence.com

WA Seattle

CA Irvine CA San Francisco **KEYENCE CANADA INC.**

AZ Phoenix

Head Office PHONE: +1-905-366-7655 FAX: +1-905-366-1122 E-mail: keyencecanada@keyence.com PHONE: +1-514-694-4740 FAX: +1-514-694-3206 Windsor PHONE: +1-905-366-7655 FAX: +1-905-366-1122