

# KEYENCE

**NEW** High-Accuracy Digital Contact Sensor  
GT2 Series



*Intelligent sensor*  
**I-SERIES**



**The GT2 Series is now available in pencil type models!**

High-accuracy and an absolute measurement are possible with a slim  $\varnothing 8$   $\varnothing 0.31$ " body

**GT2** Series





## **Unique technology allowing a compact sensor head.**

The Scale Shot System in the GT2 Series improves upon the technology of conventional contact sensors and is now concentrated into a pencil-type sensor head.



## SCALE SHOT SYSTEM II

Display resolution 0.1 $\mu\text{m}$ 0.004 Mil
Accuracy 1 $\mu\text{m}$ 0.04 Mil

The  $\varnothing 8$  mm 0.31" sensor head is equipped with KEYENCE's proprietary Scale Shot System II, which allows it to achieve the highest accuracy in its class throughout its entire measurement range. It also overcomes the disadvantages of conventional methods such as tracking errors and not knowing absolute position.

## TOUGH & RUGGED CONSTRUCTION

NEMA Type 13/IP67G
100 million cycles detecting durability
PUR cable

Complies with NEMA Type 13/IP67G oil resistance protection standards. These sensor heads can be used in wet and dusty environments, and now even in environments with splashing oil. The sensor head also clears a detecting durability of 100 million cycles with its long lasting linear ball bearings.

## MULTI-SENSOR UNIT

5 heads can connect to 1 amplifier unit
---


A multi-sensor amplifier unit has been added to our line up which allows up to 5 sensor heads to connect to 1 amplifier unit. A maximum of 3 amplifier units and 15 sensor heads can be simultaneously connected to support multi-point applications. Also, larger systems can easily be constructed using the communication units.



# FULL-RANGE, HIGH-ACCURACY PENCIL-TYPE


Combines a slim  $\varnothing 8\text{ mm}$   $\varnothing 0.31''$  body with high-accuracy measurements

The evolutionary Scale Shot System II is enclosed in the slim  $\varnothing 8\text{ mm}$   $\varnothing 0.31''$  body through the use of newly developed technology for the transmitter, receiver, and CPU. The sensor head features high accuracy while overcoming the disadvantages of conventional contact sensors such as tracking errors and unknown absolute position.

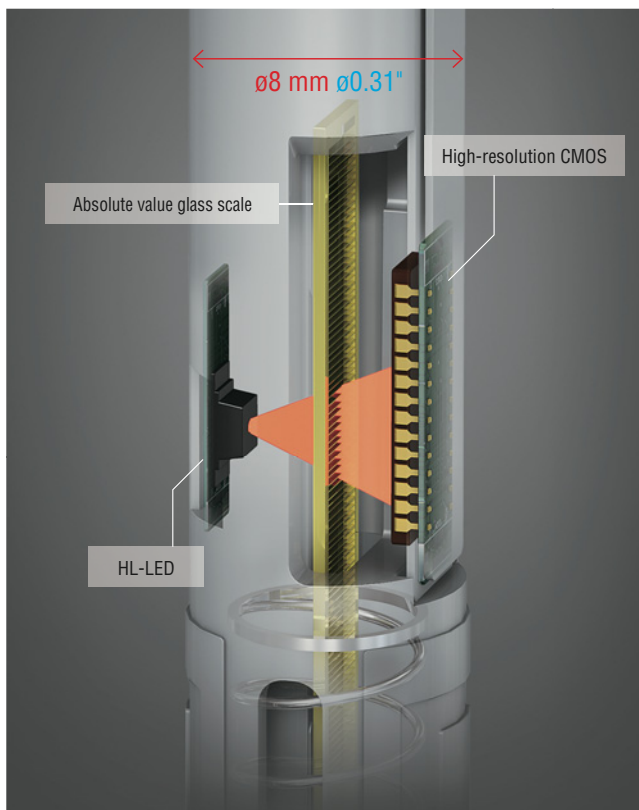

## SCALE SHOT SYSTEM II

The absolute value glass scale, with different patterns according to position, is captured at high speed with the high-resolution CMOS sensor. This detection principle reads the absolute position information from the slit pattern engraved on the scale. It is the first of its kind in the world.





## PROBLEMS WITH CONVENTIONAL TYPES

### SCALE (PULSE-COUNT) METHOD

#### TRACKING ERRORS

Tracking errors in measurement values result from sudden impact.

#### ABSOLUTE POSITION UNKNOWN

The origin point must be adjusted before operation.

### DIFFERENTIAL TRANSFORMER METHOD

#### UNSTABLE ACCURACY THROUGHOUT ENTIRE MEASURING RANGE

Unstable accuracy at the top and bottom of the measuring range.

#### POOR TEMPERATURE CHARACTERISTICS

Measurement values deviate morning, noon, and night.

#### LARGE BODY

Installation space must be considered.



## RESOLVED WITH THE SCALE SHOT SYSTEM II

Absolute measurement with the highest accuracy in its class

#### DISPLAY RESOLUTION

**0.1  $\mu\text{m}$  0.004 Mil**

#### ACCURACY

**1  $\mu\text{m}$  0.04 Mil**

### THE NEWLY DEVELOPED FEATURES THAT MAKE THE SCALE SHOT SYSTEM II POSSIBLE

#### HL-LED

A newly developed LED that is a point light source and capable of producing even intensity with a brightness 9-times that of a conventional LED.

\* HL = High luminance

#### HIGH-RESOLUTION CMOS

An imaging element with twice the pixels of a conventional imaging element that can receive the LED light passed through the absolute value glass scale with high sensitivity, increase the resolution, and create the output signal.

#### I-PROCESSOR

A custom IC equipped with new algorithms that can perform high-speed, high-resolution arithmetic processing of the output signal sent from the CMOS sensor.



First in class

# NEMA Type 13 IP67G

\*GT2-P12K(F)/P12(F)

## USABLE IN OILY ENVIRONMENTS

The sensor head, including the connector and cable section, complies with two standards - NEMA Type 13 and IP67G. The sensor head can be mounted almost anywhere, even in environments with splashing water or oil.

### ■ Oil-resistant connector and cable

Both the sensor head and connector comply with NEMA Type 13/IP67G. Extremely oil-resistant PUR (polyurethane) is used for the GT2-sensor cable to reduce the risk of oil penetration.

### ■ Seamless construction

The sensor body is cast in one piece for seamless outer construction. Corrosion from water and oil is reduced due to the fully enclosed structure.

#### NEMA Type 13

NEMA (National Electrical Manufacturers Association) specifies the classification and description of enclosures for electrical equipment. The classification is represented as the "Type", and NEMA Type 13 is designed to provide a degree of protection against the ingress of oil.

#### IP67G

IP67G represents the enclosure rating for electronic devices as defined by the JIS (Japanese Industrial Standards). IP67G represents "IP67" as defined by the IEC (International Electrotechnical Commission) with "G" added for its oil resistance.





EXTRAORDINARY DETECTING DURABILITY


# 100 million cycles

\*GT2-P12K(F)/P12(F)

A detecting durability of 100 million cycles has been achieved by using new high-strength linear ball bearings in the spindle. This can greatly reduce maintenance costs and replacement efforts.

## ■ Long lasting linear ball bearings


The all stainless steel construction of the spindle structure (shaft & bearings) reduced the weight of the GT2. Through these weight savings, wear due to friction inside the spindle has been minimized. This has dramatically increased endurance.

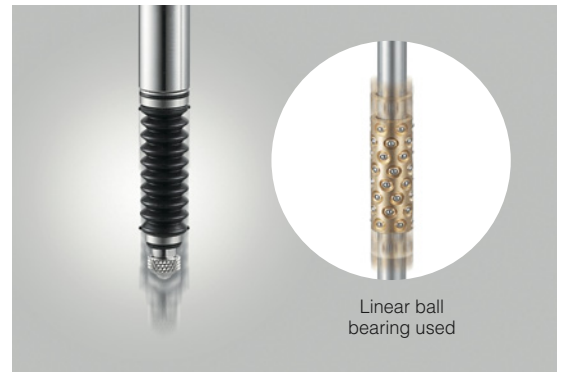

## FLEXIBLE FREE-CUT ROBOT CABLE & OIL-RESISTANT RELAY CONNECTOR

The cable between the relay connector and amplifier unit uses a flexible free-cut robot cable that withstands continuous bending. This allows the sensor to be installed on moving equipment. A detachable relay connector system is also used. This can greatly reduce replacement work during maintenance.

## ■ Flexible free-cut robot cable

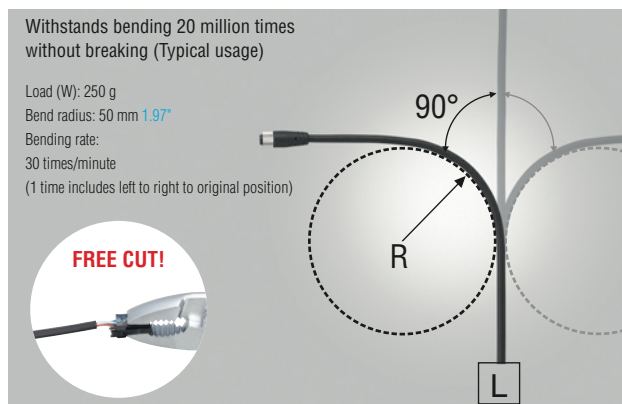

## ■ Detachable sensor head cable







## AUTOMOBILES



Flatness measurement of engine block

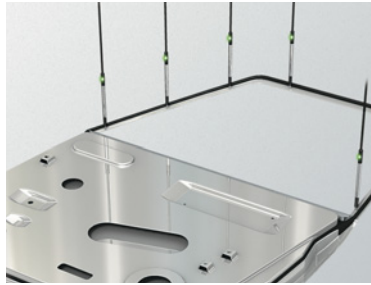


Door beam deformation check

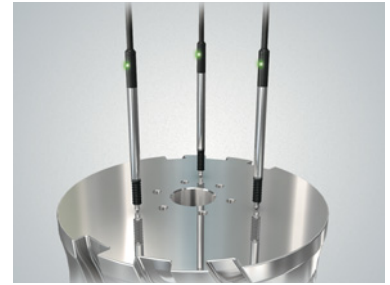

Disc assembly inspection



Camshaft runout measurement

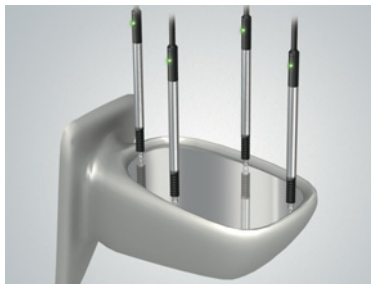

Side mirror angle inspection




Oil pan flatness measurement


## METALS



Bearing assembly inspection

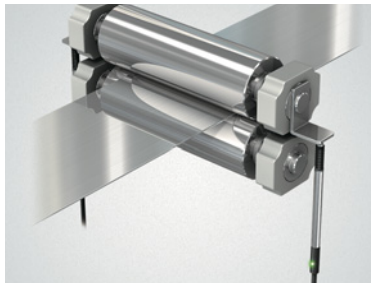

Mill roll gap management

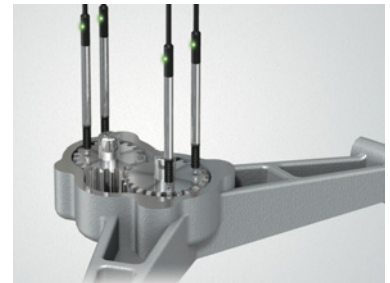


Gear assembly inspection


## EQUIPMENT



Machine tool stroke management

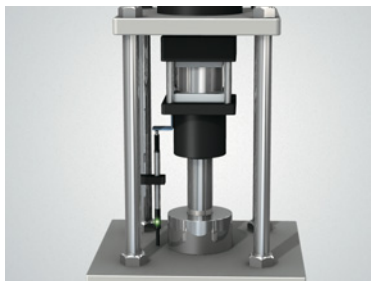

Assembly equipment press fitting inspection

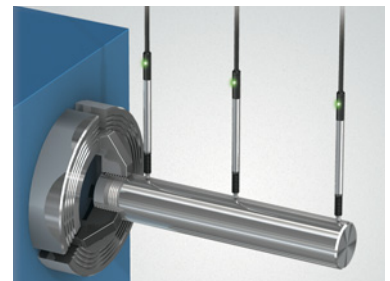

Product chucking confirmation




## ELECTRONICS



Battery flatness check




Smartphone chassis flatness inspection

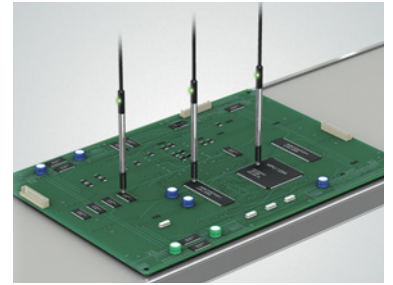


Board assembly check



Hard disk frame assembly inspection

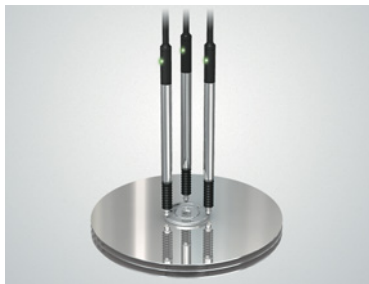


Hard disk clamp parallelism inspection

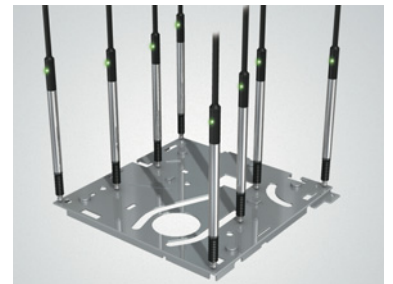


Chassis frame warpage inspection


## SEMICONDUCTORS/LIQUID CRYSTALS

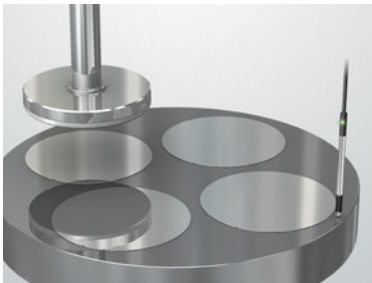

Polisher height control

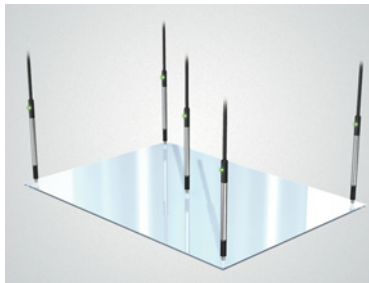


Liquid crystal panel flatness inspection

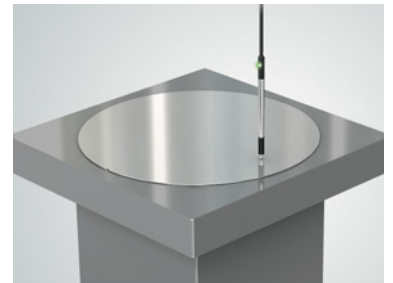


Wafer thickness measurement

## FOOD/PRINTING

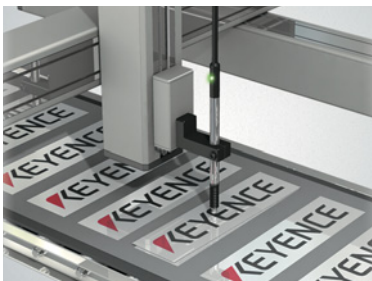

Double label stickers detection

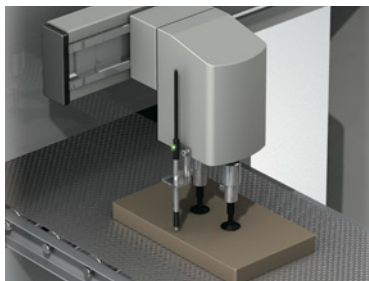


Workpiece suction check




Double feed detection



# SAVE WIRING TIME WITH OPEN FIELD NETWORK SUPPORT

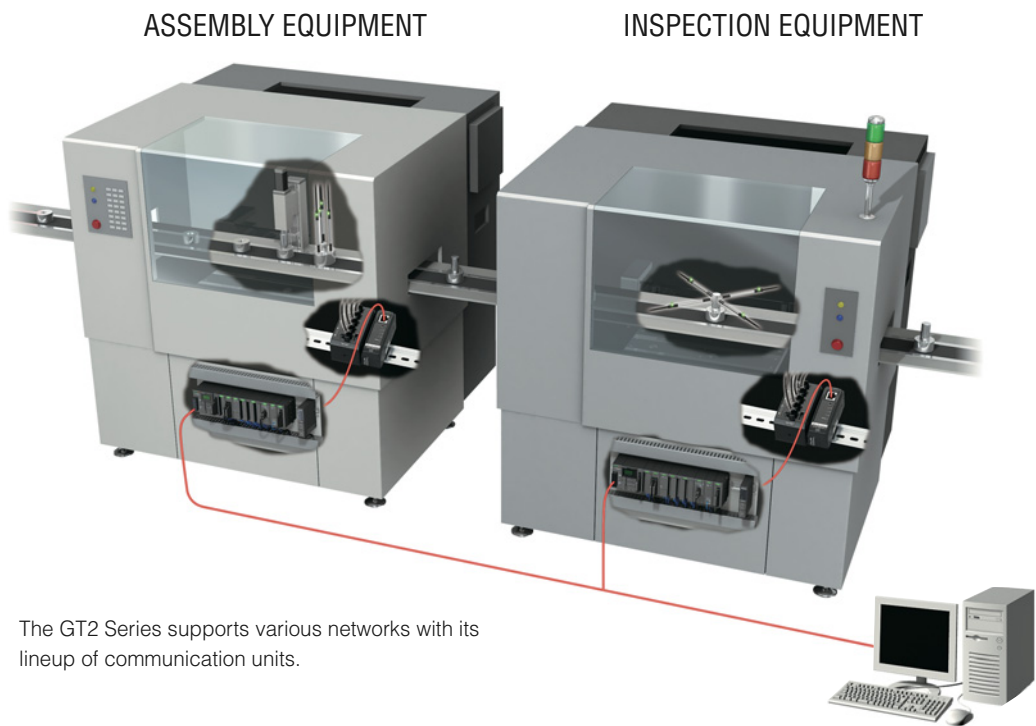

## DL Series lineup

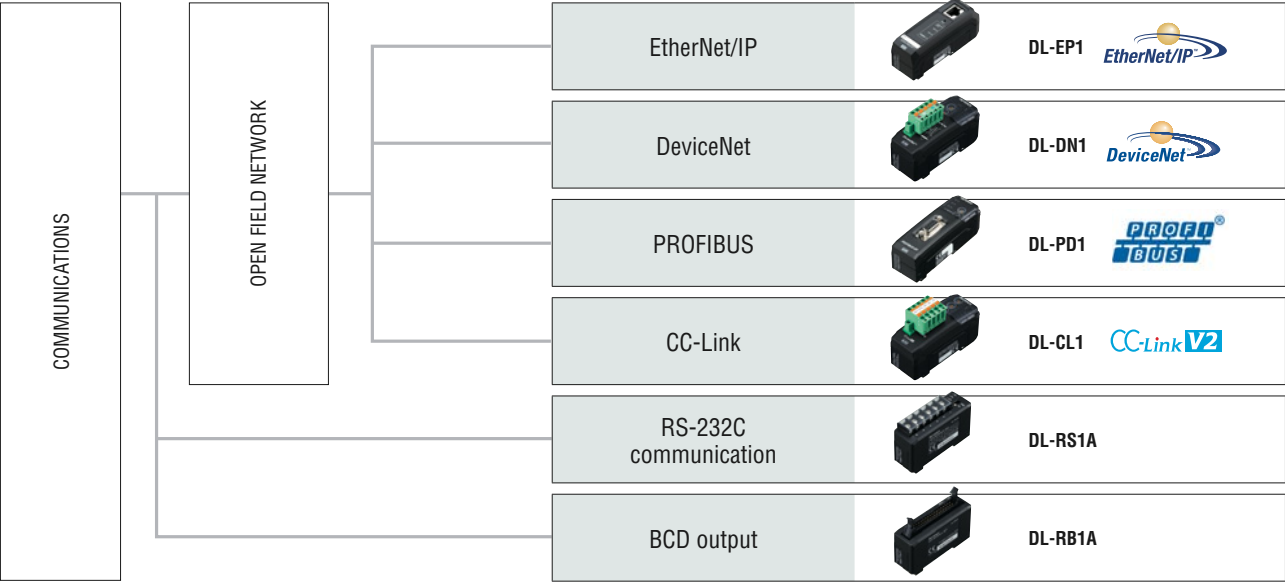




## ■ Batch read and change settings for multiple amplifier units

Batch transmit data for a maximum of 15 units.

Settings can also be changed from a PC or PLC which leads to reduced setup time.

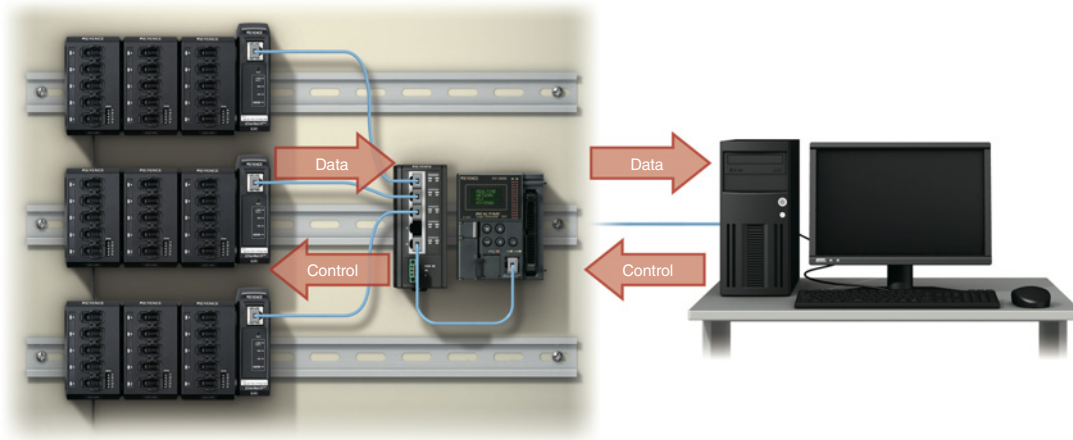

## ■ Further wiring and space savings with the multi-sensor unit NEW


Up to 5 sensor heads can be connected to 1 multi-sensor amplifier unit. Up to 3 units can be linked, which allows for a maximum of 15 connected sensor heads.



## ■ Reduced wiring and installation

When more units are used in combination with each other, more wiring is required.

If communicating with the DL Series, this unit will send data to the PLC and only two wires are required to supply power to the main unit.

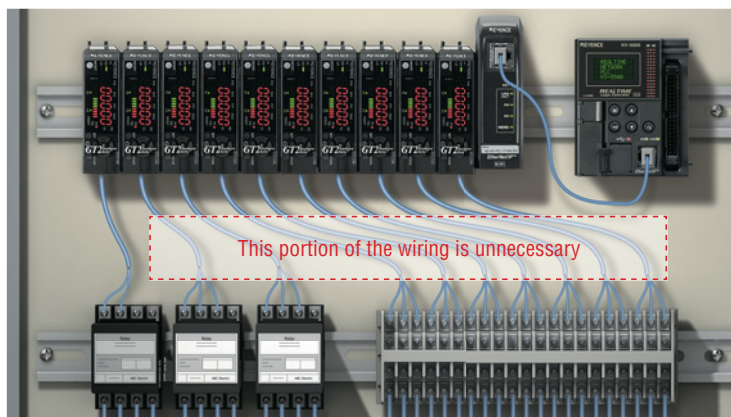

Reduce cable fabrication work

Reduce work wiring into terminal blocks



No terminal blocks required



## COST REDUCING MOUNTING METHODS



### ■ Greatly reduces design and fabrication time

The sensor can be mounted almost anywhere thanks to  $\varnothing 8$  mm  $\varnothing 0.31$ " slim body that can be mounted anywhere along its body. If you use one of the dedicated brackets, you do not need to fabricate a slotted jig. The flange type can also be directly mounted by simply drilling a  $\varnothing 10$  mm  $\varnothing 0.39$ " hole.

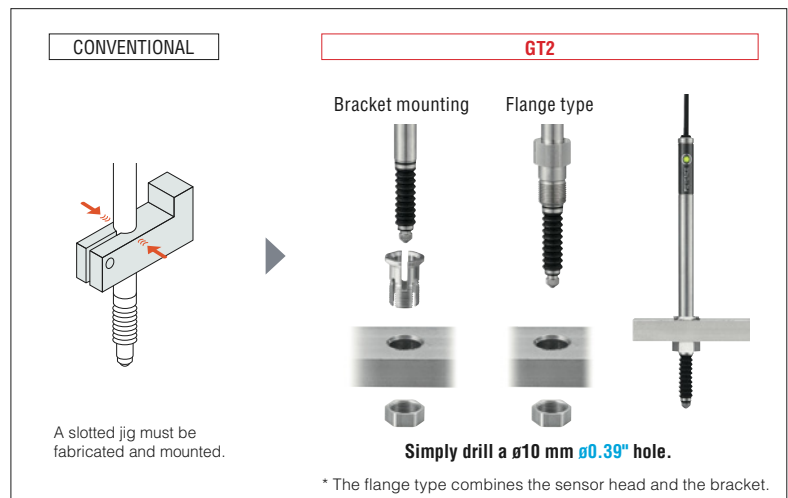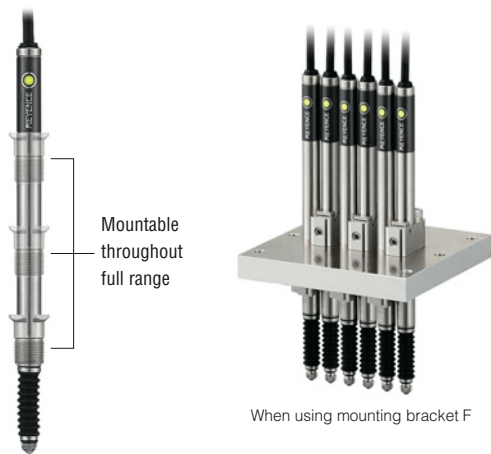

### ■ Air push type requires no drive mechanism

Measurements can be performed with the sensor head secured in place, so no mechanism is required to move the sensor head itself. This allows for space-saving installation which can greatly reduce costs at initial setup. Plus any worries about variations in accuracy due to the jig are eliminated.

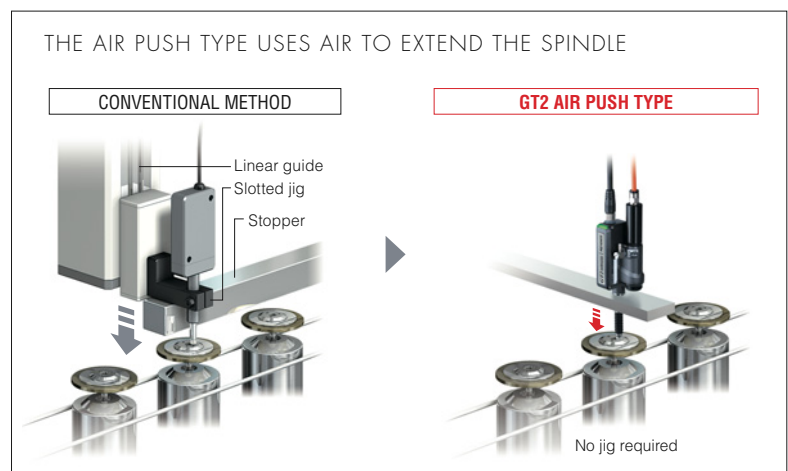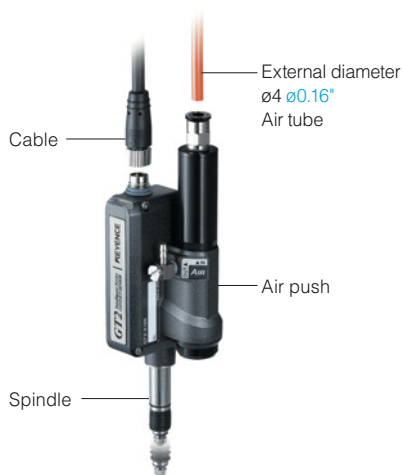



# REDUCE COSTS WITH MULTI-FUNCTION AMPLIFIER UNITS

## Simple calculations

A variety of detection modes are standard.

Calculations between additional amplifier units can be easily configured simply by selecting the desired mode.

[SHAFT DIAMETER MEASUREMENT]

Positioning the target between two sensor heads will display the outer diameter.

Main unit  
100002.5

+

Expansion unit  
-00002.5

=

Calculation result  
100000.0

[FLATNESS CHECK]

By subtracting the minimum value from the maximum value the flatness will be displayed.

Main unit  
065.10  
Maximum value

Expansion unit  
06489

Expansion unit  
06423  
Minimum value

Expansion unit  
06477

-

=

Calculation result  
00087

VERSATILE DETECTION MODES SUPPORT ALL APPLICATIONS

SINGLE HEAD

Standard

Peak hold

Bottom hold

Peak to peak

MULTIPLE HEADS/when additional amplifier units are installed (application modes)

## Total cost reductions

PLC programming or an analog input card, which was required with LVDTs, is no longer necessary.

This leads to cost reductions.

CONVENTIONAL METHOD

+

Display

= Done

+

Analog card

+

PLC programming

GT2 SOLUTION

EASY WAY

+

= Done

EASY WAY

+

= Done



## SENSOR HEAD LINEUP




Select the sensor head by measuring range, appearance, resolution, accuracy, mounting method, and measuring force

### Pencil type NEW

Measuring range	Accuracy	Standard		Flange
		Standard	Low stress	Standard
12 mm 0.47"	<b>High-accuracy</b>  Resolution 0.1 $\mu\text{m}$ 0.004 Mil Accuracy 1 $\mu\text{m}$ 0.04 Mil	<b>GT2-P12K</b>  	<b>GT2-P12KL</b>  	<b>GT2-P12KF</b>  
	<b>General-purpose</b>  Resolution 0.5 $\mu\text{m}$ 0.02 Mil Accuracy 2 $\mu\text{m}$ 0.08 Mil	<b>GT2-P12</b>  	<b>GT2-P12L</b>  	<b>GT2-P12F</b>  

### Sensor head cable

Select by the distance between the sensor head and the amplifier unit, the environment, and the mounting method


















<span style="border: 1px solid red; padding: 0 2px;">NEW</span> Oil-resistant cable (straight)* <sup>1</sup>		Standard cable (straight)		Standard cable (L-shaped)* <sup>2</sup>	
					
<b>GT2-CHP2M</b>	2 m 6.6'	<b>GT2-CH2M</b>	2 m 6.6'	<b>GT2-CHL2M</b>	2 m 6.6'
<b>GT2-CHP5M</b>	5 m 16.4'	<b>GT2-CH5M</b>	5 m 16.4'	<b>GT2-CHL5M</b>	5 m 16.4'
<b>GT2-CHP10M</b>	10 m 32.8'	<b>GT2-CH10M</b>	10 m 32.8'	<b>GT2-CHL10M</b>	10 m 32.8'
		<b>GT2-CH20M</b>	20 m 65.6'	<b>GT2-CHL20M</b>	20 m 65.6'

\*1 To satisfy NEMA Type 13/IP67G with the pencil type, the oil-resistant cable must be used.

\*2 Can only be used with the 12 mm 0.47" type.












## Box type

Measuring range	Accuracy	Standard		Flange		Air push	
		Standard	Low stress	Standard	Low stress	Standard	Low stress
12 mm 0.47"	<b>High-accuracy</b>  Resolution 0.1 $\mu\text{m}$ 0.004 Mil Accuracy 1 $\mu\text{m}$ 0.04 Mil	<b>GT2-H12K</b>  	<b>GT2-H12KL</b>  	<b>GT2-H12KF</b>  	<b>GT2-H12KLF</b>  	<b>GT2-A12K</b>  	<b>GT2-A12KL</b>  
	<b>General-purpose</b>  Resolution 0.5 $\mu\text{m}$ 0.02 Mil Accuracy 2 $\mu\text{m}$ 0.08 Mil	<b>GT2-H12</b>  	<b>GT2-H12L</b>  	<b>GT2-H12F</b>  	<b>GT2-H12LF</b>  	<b>GT2-A12</b>  	<b>GT2-A12L</b>  
32 mm 1.26"	<b>General-purpose</b>  Resolution 0.5 $\mu\text{m}$ 0.02 Mil Accuracy 3 $\mu\text{m}$ 0.12 Mil	<b>GT2-H32</b>  	<b>GT2-H32L</b>  	-	-	<b>GT2-A32</b>  	-
50 mm 1.97"	<b>General-purpose</b>  Resolution 0.5 $\mu\text{m}$ 0.02 Mil Accuracy 3.5 $\mu\text{m}$ 0.14 Mil	<b>GT2-H50</b>  	-	-	-	<b>GT2-A50</b>  	-









## AMPLIFIER UNIT LINEUP

Select according to the output method, mounting method, and number of connected units

Amplifier unit type	Appearance/model			
Judgment output (5 outputs)	<b>DIN-rail mount type</b>	<b>Panel mount type</b>	<b>5-output function</b> Judges the 5 statuses HH/High/Go/Low/LL <b>Bank function</b> Registers limit setting values and preset values in up to 4 different groups <b>Calculation functions using expansion units</b> Enables calculations such as maximum value, minimum value, and degree of flatness	
	  Connector type			
Analog output (4 to 20 mA)	<b>DIN-rail mount type</b>		<b>3-output function</b> Judges the 3 statuses High/Go/Low <b>Bank function</b> Registers limit setting values and preset values in up to 4 different groups <b>Calculation functions using expansion units</b> Enables calculations such as maximum value, minimum value, and degree of flatness	
	  Connector type			
Pulse output	<b>DIN-rail mount type</b>		<b>Minimum phase difference selection</b> [0.5/2.5/5/25 μs] Capable of batch output of position information.	
	 Increment/decrement direction Pulse output resolution Minimum phase difference			
Large display	<b>Panel mount type</b>		Easy operation with a large display and buttons. Up to 11 sensor heads can be connected using the expansion board. * With only the main body, up to 2 sensor heads can be connected	
	 			
<div>NEW</div> Multi-sensor amplifier unit	<b>DIN-rail mount type</b>		Up to 5 sensor heads can be connected to 1 amplifier unit Up to 15 sensor heads can be connected by adding 2 expansion units * A communication unit (DL Series) is required for output.	
				




## COMMUNICATION UNIT LINEUP

Communication method	Model	Appearance	Judgment result readout	Measurement value readout	Control input	Modify tolerance value	Remarks
EtherNet/IP	<b>DL-EP1</b>		◎	◎	◎	○	Uses cyclic communication. A communication program does not need to be created. Change settings using explicit message communication.
DeviceNet	<b>DL-DN1</b>		◎	◎	◎	◎	Uses I/O communication. A communication program does not need to be created. Change settings using explicit message communication.
PROFIBUS	<b>DL-PD1</b>		◎	◎	◎	○	Uses cyclic transmissions. A communication program does not need to be created. Change settings using the DP-V1 service.
CC-Link	<b>DL-CL1</b>		◎	◎	◎	◎	Uses cyclic transmissions. A communication program does not need to be created. Change settings using handshake control.
RS-232C	<b>DL-RS1A</b>		○	○	○	○	Uses RS-232C communication. Communicate by creating a communication program.
BCD	<b>DL-RB1A</b>		×	○	×	×	Measurement values are synchronized and updated with the input terminal or automatically updated by timer. Values are synchronized and read by strobe output.

The ◎ symbol indicates wire savings and communication program creation is not required. ○=Can be accessed by creating a communication program. ×=Cannot be accessed.


## SYSTEM CONFIGURATION

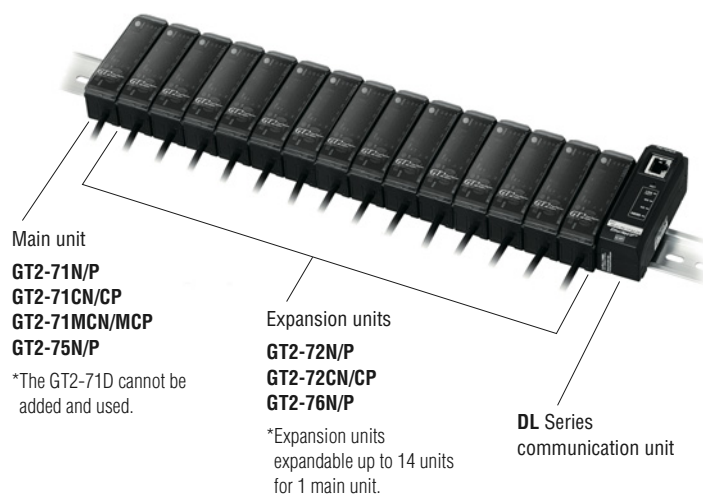

### Adding expansion units to the main unit


#### Expand with the side connector.

To add a unit, please use the separately available end unit (OP-26751).



#### Expand with the cable included with the expansion unit.

To add a unit, mount vertically with the main unit as the top unit.








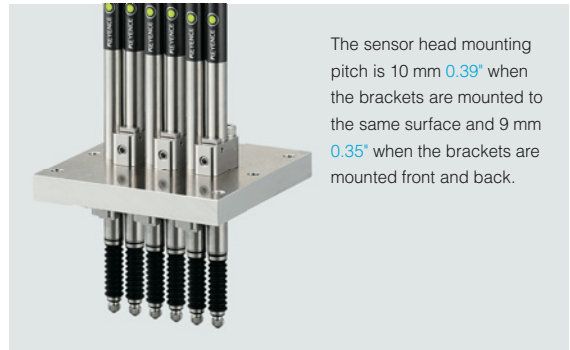
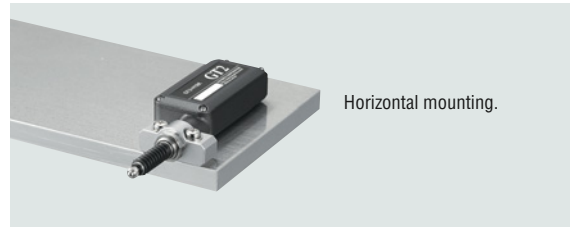
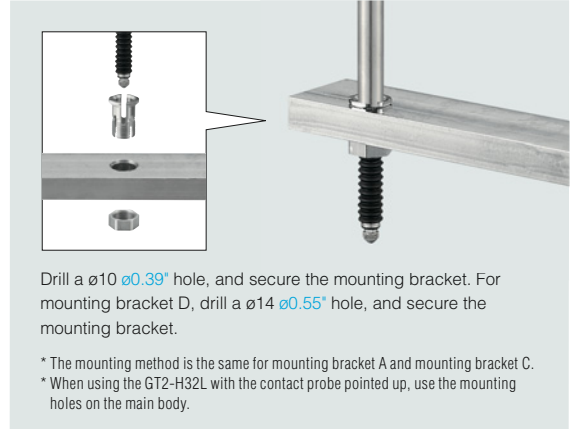
\* To mount horizontally, the separately available OP-35361 (expansion cable 300 mm 11.81") is required.



## OPTIONS

### Mounting brackets (GT2 12 mm 0.47" type mounting brackets)

 <p><b>GENERAL PURPOSE TYPE</b> Mounting bracket A <b>OP-76874</b></p>	 <p><b>SIDE MOUNTING TYPE</b> Mounting bracket B <b>OP-76875</b></p>
 <p><b>REINFORCED HOLDING FORCE TYPE</b> Mounting bracket C <b>OP-84396</b> Vibration resistant</p>	 <p><b>SIDE MOUNTING TYPE</b> Mounting bracket E <b>OP-87220</b> Reinforced holding force</p>
<div>NEW</div>  <p><b>COUPLED MOUNTING TYPE</b> Mounting bracket F <b>OP-87863</b></p>	



### Mounting bracket (GT2 32 mm 1.26"/50 mm 1.97" type mounting brackets)

 <p><b>REINFORCED HOLDING FORCE TYPE</b> Mounting bracket D <b>OP-84327</b> Vibration resistant</p>
--

## Contacts



 <p><b>STANDARD</b><sup>*1</sup> <b>OP-77678</b> For standard measurements</p>	 <p><b>SUPER-TOUGH</b><sup>*2</sup> <b>OP-77682</b> Uses a super-tough alloy, for high-accuracy measurements</p>	 <p><b>FLAT PLATE</b> <b>OP-77679</b> For objects with a curved or pointed surface</p>	 <p><b>ROLLER</b> <b>OP-77680</b> For moving objects</p>	 <p><b>FLUOROCARBON RESIN</b> <b>OP-80228</b> Made from material that is unlikely to damage the target's surface</p>
 <p><b>CERAMIC</b> <b>OP-81970</b> To electrically insulate the sensor from the target</p>	 <p><b>NEEDLE</b> <b>OP-77681</b> To measure in tight locations</p>	 <p><b>OFFSET</b> <b>OP-77683</b> For multiple measurements of a small object</p>	 <p><b>SPACER</b> <b>OP-77684</b> Extends the spindle 12.2 mm 0.48"</p>	 <p><b>ROLLER (HIGH-ACCURACY)</b> <b>OP-93332</b> For use when the roller eccentricity is a concern</p>

\*1 Standard on the GT2-P12(L/F), GT2-H(A)12(L/F/LF), GT2-H(A)32(L), GT2-H(A)50






\*2 Standard on the GT2-P12K(L/F), GT2-H(A)12K(L/F/LF)



## Dust boots

 <p>STANDARD DUST BOOT (material: NBR) For 12 mm <b>0.47"</b> <b>OP-84332</b> For 32 mm <b>1.26"</b> <b>OP-84459</b> For 50 mm <b>1.97"</b> <b>OP-84460</b></p>	<div>NEW</div>  <p>FLUOROCARBON RUBBER DUST BOOT (material: FKM) For 12 mm <b>0.47"</b> <b>OP-87859</b></p>
--	--


## Amplifier unit options (for DIN-rail mount/panel mount types)

 <p>DIN-RAIL TYPE AMPLIFIER UNIT BRACKET <b>OP-76877</b></p>	 <p>END UNIT (2 count) <b>OP-26751</b></p>	 <p>SOCKET CABLE <b>GT2-CA2M/CA10M</b> Required with the connector type</p>	 <p>PANEL MOUNT <b>OP-84394</b> Included with the panel type</p>	 <p>EXPANSION CABLE 300 mm <b>11.81"</b> <b>OP-35361</b> To connect panel types horizontally, and to connect the panel type and the DL</p>
---	---	--	---	---

## Amplifier unit options (for the GT2-100N/100P)

 <p>EXPANSION BOARD <b>GT2-E3N/E3P</b> Can expand 3 sensor heads per 1 board</p>	 <p>BRACKET <b>OP-84331</b> To mount on a rack</p>	 <p>20-PIN MIL CONNECTOR <b>OP-22185</b> For 1 to 2 sensor heads</p>	 <p>30-PIN MIL CONNECTOR <b>OP-84456</b> For the expansion board</p>
 <p>CONTACTS for AWG24 to 22, 200 count <b>OP-22186</b> For OP-22185/84456</p>	 <p>CONTACTS for AWG28 to 26, 200 count <b>OP-30594</b> For OP-22185/84456</p>	 <p>SPECIAL CRIMPING TOOL <b>OP-21734</b> For crimping OP-22186/30594</p>	 <p>EXPANSION CABLE 300 mm <b>11.81"</b> <b>OP-35361</b> Use when connecting the DL</p>




## Others

 <p>2-ø4 <b>ø0.16"</b></p> <p>SPEED CONTROLLER <b>OP-82133</b> For adjusting the air for air push type</p>	 <p>LIFT LEVER <b>OP-84397</b> Manually lifts the spindle</p>	 <p>SENSOR HEAD RELAY CABLE <b>OP-87431/87432/87433</b> M8-M8 relay cable 3.5 m <b>11.5'</b>/7.5 m <b>24.6'</b>/9.0 m <b>29.5'</b></p>	 <p>CONNECTORS Replacements for connecting to the amplifier unit <b>OP-84338</b> (2 count) For the sensor head cable</p>
---	--	--	---



## SPECIFICATIONS

### Pencil type (High-accuracy type) NEW

Model		GT2-P12K	GT2-P12KF	GT2-P12KL
Appearance				
Detection system		Scale Shot System II, absolute (no tracking errors) type		
Measuring range		12 mm <b>0.47"</b>		
Resolution		0.1 μm <b>0.004 Mil</b>		
Indicated accuracy*1		1 μm <b>0.04 Mil</b> (P-P)		
Measuring force *2	Downward mounting	1.0 N		0.2 N
	Side mounting	0.95 N		0.15 N
	Upward mounting	0.9 N		0.1 N
Sampling cycle		4 ms		
Mechanical response*1		10 Hz		4 Hz
Operation indicator		2-color LED (red, green)		
Environmental resistance	Enclosure rating	IP67G (JIS)*3 IP67 (IEC) NEMA Type 13*3		-
	Ambient temperature	-10 to +55°C <b>14 to 131°F</b> (No freezing)		
	Relative humidity	35 to 85% RH (No condensation)		
	Vibration	10 to 55 Hz Double amplitude 1.5 mm <b>0.06"</b> in the X, Y, Z axis directions respectively, 2 hours		
	Impact resistance	1000 m/s <sup>2</sup> (IEC60068-2-27)		
Materials	Main body	Main body case: SUS 303, Status indicator: PET, Sensor head-relay connector cable: PUR, Relay connector: PBT		
	Dustboot	NBR		-
	Contact*4	SUS304, cemented tungsten carbide		
Sensor head cable		Optional (connect to relay connector)		
Weight (not including cable)*5		Approx. 35 g	Approx. 45 g	Approx. 35 g




\*1 Value when the ambient temperature is 20°C **68°F**. \*2 Representative value at the center of the measuring range. The measuring force when using OP-87859 is the above value +0.4 N.

\*3 When an M8 oil-resistant cable (GT2-CHP2M/CHP5M/CHP10M) is used for the sensor head cable. \*4 Contacts are available as options sold separately. \*5 Including the relay connector.

Note: You may not be able to connect the sensor head to the amplifier unit depending on when the amplifier unit was purchased.

For details, contact your local sales office.

### Pencil type (General purpose type) NEW

Model		GT2-P12	GT2-P12F	GT2-P12L
Appearance				
Detection system		Scale Shot System II, absolute (no tracking errors) type		
Measuring range		12 mm <b>0.47"</b>		
Resolution		0.5 μm <b>0.02 Mil</b>		
Indicated accuracy*1		2 μm <b>0.08 Mil</b> (P-P)		
Measuring force*2	Downward mounting	1.0 N		0.2 N
	Side mounting	0.95 N		0.15 N
	Upward mounting	0.9 N		0.1 N
Sampling cycle		4 ms		
Mechanical response*1		10 Hz		4 Hz
Operation indicator		2-color LED (red, green)		
Environmental resistance	Enclosure rating	IP67G (JIS)*3 IP67 (IEC) NEMA Type 13*3		-
	Ambient temperature	-10 to +55°C <b>14 to 131°F</b> (No freezing)		
	Relative humidity	35 to 85% RH (No condensation)		
	Vibration	10 to 55 Hz Double amplitude 1.5 mm <b>0.06"</b> in the X, Y, Z axis directions respectively, 2 hours		
	Impact resistance	1000 m/s <sup>2</sup> (IEC60068-2-27)		
Materials	Main body	Main body case: SUS 303, Status indicator: PET, Sensor head-relay connector cable: PUR, Relay connector: PBT		
	Dustboot	NBR		-
	Contact*4	SUS304, SUS440C		
Sensor head cable		Optional (connect to relay connector)		
Weight (not including cable)*5		Approx. 35 g	Approx. 45 g	Approx. 35 g

\*1 Value when the ambient temperature is 20°C **68°F**. \*2 Representative value at the center of the measuring range. The measuring force when using OP-87859 is the above value +0.4 N.









\*3 When an M8 oil-resistant cable (GT2-CHP2M/CHP5M/CHP10M) is used for the sensor head cable. \*4 Contacts are available as options sold separately. \*5 Including the relay connector.

Note: You may not be able to connect the sensor head to the amplifier unit depending on when the amplifier unit was purchased.

For details, contact your local sales office.



## Box type




Model	GT2-H12K	GT2-H12KF	GT2-H12KL	GT2-H12KLF	GT2-H12	GT2-H12F	GT2-H12L	GT2-H12LF
Appearance								
Detection system	Scale Shot System, absolute (no tracking errors) type							
Measuring range	12 mm 0.47"							
Resolution	0.1 μm 0.004 Mil				0.5 μm 0.02 Mil			
Indicated accuracy*1	1 μm 0.04 Mil (P-P)				2 μm 0.08 Mil (P-P)			
Measuring force *2	Downward mounting	1.0 N		0.4 N		1.0 N		0.4 N
	Side mounting	0.9 N		0.3 N		0.9 N		0.3 N
	Upward mounting	0.8 N		0.2 N		0.8 N		0.2 N
Sampling cycle	1 ms							
Mechanical response*1	10 Hz		4 Hz		10 Hz		4 Hz	
Operation indicator	2-color LED (red, green)							
Environmental resistance	Enclosure rating	IP67 (IEC)		-		IP67 (IEC)		-
	Ambient temperature	-10 to +55°C 14 to 131°F (No freezing)						
	Relative humidity	35 to 85% RH (No condensation)						
	Vibration	10 to 55 Hz Double amplitude 1.5 mm 0.06" in the X, Y, Z axis directions respectively, 2 hours						
	Impact resistance	1000 m/s² (IEC60068-2-27)						
Materials	Main body	Main body case: die-cast zinc, Indicator: polyarylate (PAR)						
	Dustboot	NBR		-		NBR		-
	Contact*3	SUS304, cemented tungsten carbide				SUS304, SUS440C		
Sensor head cable	Optional (connect to the M8 connector)							
Weight (not including cable)	Approx. 95 g	Approx. 100 g	Approx. 95 g	Approx. 100 g	Approx. 95 g	Approx. 100 g	Approx. 95 g	Approx. 100 g

\*1 Value when the ambient temperature is 20°C 68°F.

\*2 Representative value at the center of the measuring range. Please note that the measuring force varies by the installation state of the dust boot.

\*3 Contacts are available as options sold separately.

## Box type (long range type)

Model	GT2-H32	GT2-H32L	GT2-H50	
Appearance				
Detection system	Scale Shot System, absolute (no tracking errors) type			
Measuring range	32 mm 1.26"		50 mm 1.97"	
Resolution	0.5 μm 0.02 Mil			
Indicated accuracy*1	3 μm 0.12 Mil (P-P)		3.5 μm 0.14 Mil (P-P)	
Measuring force *2	Downward mounting	2.1 N	1.2 N	3.2 N
	Side mounting	1.8 N	0.9 N	2.8 N
	Upward mounting	1.5 N	0.6 N	2.4 N
Sampling cycle	1 ms			
Mechanical response*1	6 Hz	5 Hz	7 Hz	
Operation indicator	2-color LED (red, green)			
Environmental resistance	Enclosure rating	IP67 (IEC)	-	IP67 (IEC)
	Ambient temperature	-10 to 55°C 14 to 131°F (No freezing)		
	Relative humidity	35 to 85% RH (No condensation)		
Materials	Vibration	10 to 55 Hz Double amplitude 1.5 mm 0.06" in the X, Y, Z axis directions respectively, 2 hours		
	Main body	Main body case: die-cast zinc, Indicator: polyarylate (PAR)		
	Dustboot	NBR	-	NBR
	Contact*3	SUS304, SUS440C		
Sensor head cable	Optional (connect to the M8 connector)			
Weight (not including cable)	Approx. 270 g		Approx. 320 g	

\*1 Value when the ambient temperature is 20°C 68°F.





\*2 Representative value at the center of the measuring range. Please note that the measuring force varies by the installation state of the dust boot.

\*3 Contacts are available as options sold separately.



## SPECIFICATIONS



### Box type (air push type)

Model		GT2-A12K		GT2-A12KL		GT2-A12		GT2-A12L	
Appearance									
Detection system		Scale Shot System, absolute (no tracking errors) type							
Measuring range		12 mm 0.47"							
Resolution		0.1 μm 0.004 Mil				0.5 μm 0.02 Mil			
Indicated accuracy*1		1 μm 0.04 Mil (P-P)				2 μm 0.08 Mil (P-P)			
Measuring force*2	Downward mounting	1.2 N		0.4 N		1.2 N		0.4 N	
	Side mounting	1.1 N		0.3 N		1.1 N		0.3 N	
	Upward mounting	1.0 N		0.2 N		1.0 N		0.2 N	
Sampling cycle		1 ms							
Applied pressure range		0.25 MPa to 0.50 MPa							
Pressure resistance		1 MPa							
Fluid used		Dry air							
Operation indicator		2-color LED (red, green)							
Environmental resistance	Enclosure rating	IP67 (IEC)*3		-		IP67 (IEC)*3		-	
	Ambient temperature	0 to +55°C 32 to 131°F (No freezing)							
	Relative humidity	35 to 85% RH (No condensation)							
	Vibration	10 to 55 Hz Double amplitude 1.5 mm 0.06" in the X, Y, Z axis directions respectively, 2 hours							
	Impact resistance	1000 m/s² (IEC60068-2-27)							
Materials	Main body	Main body case: die-cast zinc, Cylinder section: aluminum alloy, Air joint resin: polyacetal, Air joint metal: nickel-plated brass, Indicator: polyarylate (PAR)							
	Dustboot	NBR		-		NBR		-	
	Contact*4	SUS304, cemented tungsten carbide				SUS304, SUS440C			
Sensor head cable		Optional (connect to the M8 connector)							
Weight (not including cable)		Approx. 145 g							

\*1 Value when the ambient temperature is 20°C 68°F. \*2 Representative value at the center of the measuring range. Please note that the measuring force varies by the installation state of the dust boot.

\*3 Connect an exhaust joint to the air tube and ensure that foreign matter does not enter the tube from joint. \*4 Contacts are available as options sold separately.

### Box type (air push type/long range type)




Model		GT2-A32		GT2-A50	
Appearance					
Detection system		Scale Shot System, absolute (no tracking errors) type			
Measuring range		32 mm 1.26"		50 mm 1.97"	
Resolution		0.5 μm 0.02 Mil			
Indicated accuracy*1		3 μm 0.12 Mil (P-P)		3.5 μm 0.14 Mil (P-P)	
Measuring force*2	Downward mounting	2.1 N		3.2 N	
	Side mounting	1.8 N		2.8 N	
	Upward mounting	1.5 N		2.4 N	
Sampling cycle		1 ms			
Applied pressure range		0.25 MPa to 0.50 MPa			
Pressure resistance		1 MPa			
Fluid used		Dry air			
Operation indicator		2-color LED (red, green)			
Environmental resistance	Enclosure rating	IP67 (IEC)*3			
	Ambient temperature	0 to +55°C 32 to 131°F (No freezing)			
	Relative humidity	35 to 85% RH (No condensation)			
	Vibration*4	10 to 55 Hz Double amplitude 1.5 mm 0.06" in the X, Y, Z axis directions respectively, 2 hours			
Materials	Main body	Main body case: die-cast zinc, Cylinder section: aluminum alloy, Air joint resin: polyacetal, Air joint metal: nickel-plated brass, Indicator: polyarylate (PAR)			
	Dustboot	NBR			
	Contact*5	SUS304, SUS440C			
Sensor head cable		Optional (connect to the M8 connector)			
Weight (not including cable)		Approx. 340 g		Approx. 405 g	

\*1 Value when the ambient temperature is 20°C 68°F. \*2 Representative value at the center of the measuring range. Please note that the measuring force varies by the installation state of the dust boot.

\*3 Connect an exhaust joint to the air tube and ensure that foreign matter does not enter the tube from joint. \*4 When using mounting bracket D (OP-84327), the double amplitude is 0.75 mm 0.03". \*5 Contacts are available as options sold separately.



## Judgment output/analog output type

Model	NPN output	Main unit	GT2-71(C)N	GT2-75N	GT2-71MCN
		Expansion unit *1	GT2-72(C)N	GT2-76N	-
	PNP output	Main unit	GT2-71(C)P	GT2-75P	GT2-71MCP
		Expansion unit *1	GT2-72(C)P	GT2-76P	-
Appearance					
Mounting type*2			DIN-rail mount	Panel mount	DIN-rail mount
Number of expansion units *1			Up to 14 expansion units for 1 main unit		
Power supply voltage *1			10 to 30 VDC, including 10% ripple (P-P), Class 2		20 to 30 VDC, including 10% ripple (P-P), Class 2
Display range			-199.999.9 to 199.999.9		
Display resolution			0.1 μm 0.004 Mil		
Power consumption	Normal		2200 mW or less (73.3 mA or less at 30 V)		2700 mW or less (90.0 mA or less at 30 V)
	Power saving (Eco half)		1800 mW or less (60.0 mA or less at 30 V)		2300 mW or less (76.7 mA or less at 30 V)
	Power saving (Eco all)		1700 mW or less (56.7 mA or less at 30 V)		2200 mW or less (73.3 mA or less at 30 V)
Response time			hsp (3)/5/10/100/500/1000 ms (When using GT2-Pxxx, hsp (12)/20/40/400/2000/4000 ms)		
Control output (HH/HI/GO/LO/LL)*3	NPN output		NPN open collector, 40 V 50 mA or less, residual voltage 1 V or less*1		
	PNP output		PNP open collector, 30 V 50 mA or less, residual voltage 1 V or less *1		
Control input	Timing/preset/reset/bank input		No-voltage input		
Analog output	Output range		-		4 to 20 mA with a max. load resistance of 350 Ω
	Response time		-		Set response time + 1 ms
Environmental resistance	Ambient temperature		-10 to +50°C 14 to 122°F (No freezing)*1		
	Relative humidity		35 to 85% RH (No condensation)		
	Vibration		10 to 55 Hz Double amplitude 1.5 mm 0.06" in the X, Y, Z axis directions respectively, 2 hours		
Materials			Main body case/front cover: polycarbonate (PC), Key top: polyacetal (POM), Front sheet: polyethylene terephthalate (PET), Cable: polyvinyl chloride (PVC)		
Weight	GT2-71N(P)/72N(P)		Approx. 140 g (including power supply cable)		
	GT2-75N(P)/76N(P)		Approx. 140 g (including panel mount, front protective cover, power supply cable)		
	GT2-71MCN(P)/71CN(P)/72CN(P)		Approx. 70 g (not including the GT2-CA2M/CA5M/CA10M)		


\*1 When adding expansion units, there are the following restrictions according to the number of connected units.

- When 2 to 8 units are connected including the main unit
  - Power supply voltage: 20 to 30 VDC
  - Control output current: 20 mA or less
  - (GT2-71MCN(P) only) Ambient temperature: -10 to 45°C 14 to 113°F
- When 9 to 15 units are connected including the main unit
  - Power supply voltage: 20 to 30 VDC
  - Control output current: 10 mA or less (including the DL-RB1A output current)
  - Residual voltage: 1.5 V or lower
  - (GT2-71MCN(P) only) Ambient temperature: -10 to 45°C 14 to 113°F

\*2 When using the DIN-rail mount type, always mount it to a DIN-rail (mounted to a metal plate), and when adding expansion units, always use the end unit (OP-26751).

\*3 The GT2-71MCN(P) does not have HH/LL.



## Pulse output type

Model	GT2-71D	
Appearance		
Mounting type	DIN-rail mount	
Number of expansion units	Only 1 unit	
Power supply voltage	10 to 30 VDC, including 10% ripple (P-P), Class 2	
Power consumption	1600 mW or less (53.3 mA or less at 30 V)	
Indicators	Power supply (green)/alarm (red) indicator, pulse output indicator (green), input indicator	
Pulse resolution	Select from 0.1/0.5/1/10 μm 0.004/0.02/0.04/0.4 Mil (when shipped: 0.5 μm 0.02 Mil)	
Minimum phase difference	Select from 0.5/2.5/5/25 μs (when shipped: 2.5 μs)	
Control input	Origin return	No-voltage input (contact, non-contact)
Output signal	90° phase difference, differential square wave (EIA-422 compliant) 4x multiplier	
Output signal level	+5 V	
Environmental resistance	Ambient temperature	-10 to +50°C 14 to 122°F (No freezing)
	Relative humidity	35 to 85% RH (No condensation)
	Vibration	10 to 55 Hz Double amplitude 1.5 mm 0.06" in the X, Y, Z axis directions respectively, 2 hours
Materials	Main body case/front cover: polycarbonate (PC), Cable: polyvinyl chloride (PVC)	
Weight	Approx. 110 g (including power supply cable)	



## SPECIFICATIONS

### Large display type


Model		GT2-100N	GT2-E3N
		GT2-100P	GT2-E3P
Appearance			
Mounting type		Panel mount	-
Number of connectable heads		2 heads with GT2-100N(P) alone + 3 heads per 1 head board expansion When expanded with a maximum of 3 head boards, 11 heads	-
Power supply voltage		10 to 30 VDC, including 10% ripple (P-P), Class 2	Supplied from the GT2-100N/100P
Display range		-199.999.9 to 199.999.9	-
Display resolution		0.1 μm 0.004 Mil	-
Power consumption	Normal	4500 mW or less (150.0 mA or less at 30 V)	4200 mW or less (140.0 mA or less at 30 V)
	Power saving (Eco half) *1	3700 mW or less (123.3 mA or less at 30 V)	4200 mW or less (140.0 mA or less at 30 V)
	Power saving (Eco all) *1	3600 mW or less (120.0 mA or less at 30 V)	4000 mW or less (133.3 mA or less at 30 V)
Response time		hsp (3)/5/10/100/500/1000 ms (When using GT2-Pxxx, hsp (12)/20/40/400/2000/4000 ms)	
Control output (HH/Hi/GO/LO/LL)	NPN output	NPN open collector, 40 V 50 mA or less*3, residual voltage 1 V or less	
	PNP output	PNP open collector, 30 V 50 mA or less*3, residual voltage 1 V or less	
Control input	Timing/preset/ reset/bank input	No-voltage input	
Input/output connector *2		Power supply: Terminal block connection Input/output: 20-pin connector (MIL standard)	30-pin connector (MIL standard)
Environmental resistance	Ambient temperature	-10 to +50°C 14 to 122°F (No freezing)	
	Relative humidity	35 to 85% RH (No condensation)	
	Vibration	10 to 55 Hz Double amplitude 0.15 mm 0.01" in the X, Y, Z axis directions respectively, 2 hours	
Materials		Main body case/front cover: polycarbonate (PC), Key top: polyacetal (POM), Front sheet: polyethylene terephthalate (PET)	-
Weight		Approx. 380 g	Approx. 80 g

\*1 When the maximum number of sensor heads is connected, and all devices are set to power saving settings

\*2 The connector and cable are sold separately.

\*3 When 2 or more sensor heads are connected, 20 mA or less.

### Multi-head type NEW

Model		GT2-500	GT2-550
		Main unit	Expansion unit
Appearance			
Mounting type *1		DIN-rail mount	
Number of expansion units *2		Maximum of 3 units including the main unit (Maximum of 15 sensor heads)	
Power supply voltage		20 to 30 VDC, including 10% ripple (P-P) (GT2-550 power supplied from the main unit), Class 2	
Consumption current		4800 mW 160.0 mA or less at 30 V	
Response time		hsp (3)/5/10/100/500/1000 ms (When using GT2-Pxxx, hsp (12)/20/40/400/2000/4000 ms)	
Environmental resistance	Ambient temperature	-10 to +50°C 14 to 122°F	
	Relative humidity	35 to 85% RH (No condensation)	
	Vibration	10 to 55 Hz Double amplitude 1.5 mm 0.06" in the X, Y, Z axis directions respectively, 2 hours	
Materials		Main body case: polycarbonate, Cable: PVC	
Weight		GT2-500: Approx. 140 g, GT2-550: Approx. 95 g	

\*1 When connecting the DL Series and expansion units, always connect them when the amplifier unit is connected to the DIN-rail and use the end unit (OP-26751 included with the DL Series).

\*2 When using the DL-RB1A (for communication), ensure that the output current is 10 mA or less.









## DIMENSIONS


Sensor head (Standard)  
GT2-H12K/GT2-H12  
GT2-H12KF/GT2-H12F

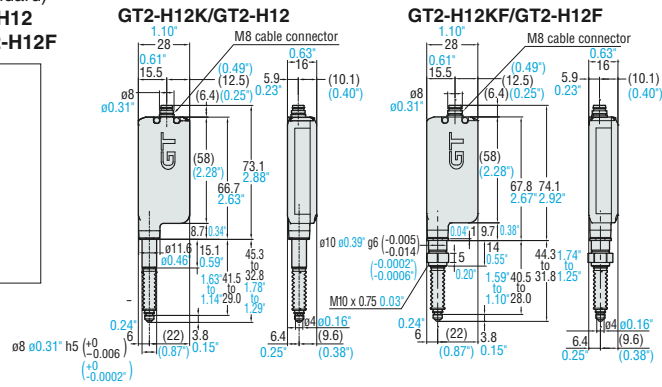


Cable connection  
(Straight)




Cable connection  
(L-shaped)




Sensor head (Low stress)  
GT2-H12KL/GT2-H12L  
GT2-H12KLF/GT2-H12LF

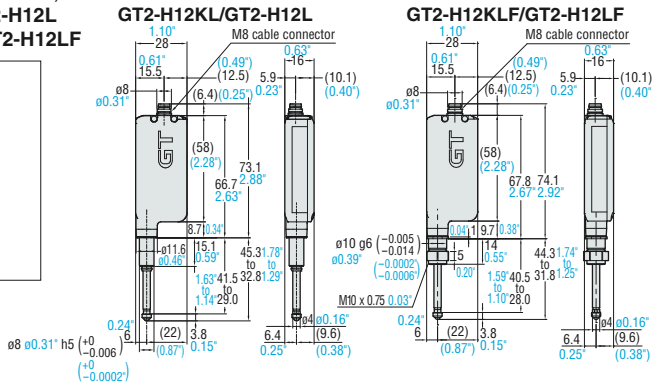


Cable connection  
(Straight)




Cable connection  
(L-shaped)




Sensor head (Standard)  
GT2-H32

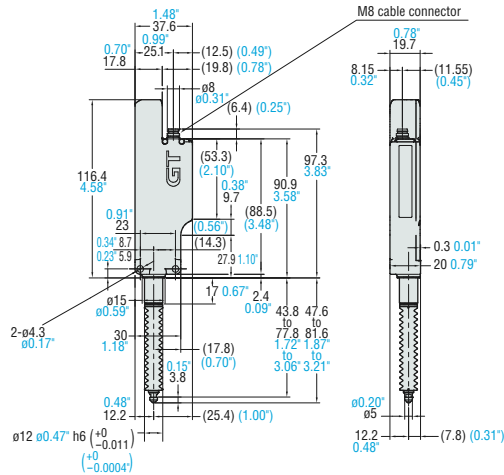


Cable connection  
(Straight)

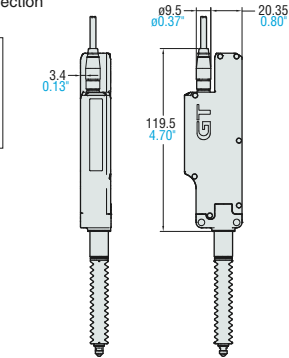








Sensor head  
(Low stress)  
GT2-H32L

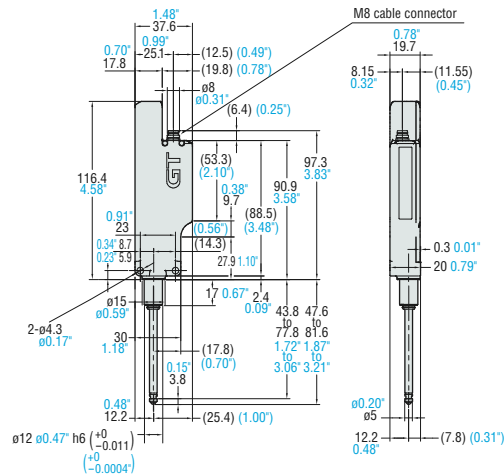

Cable connection  
(Straight)

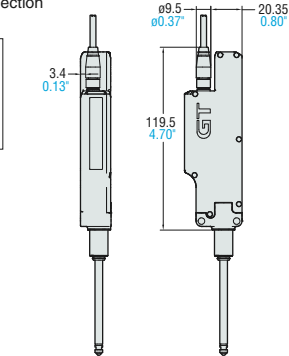

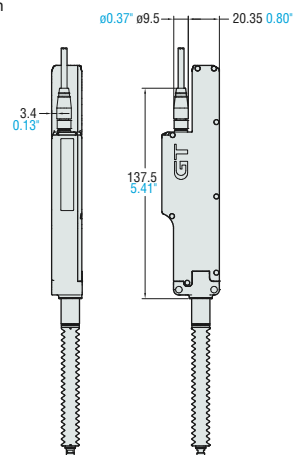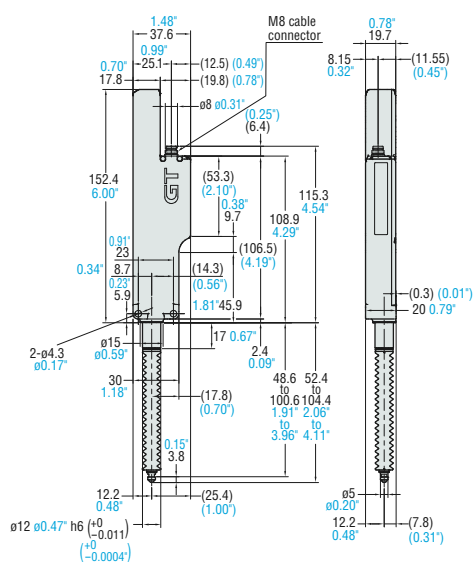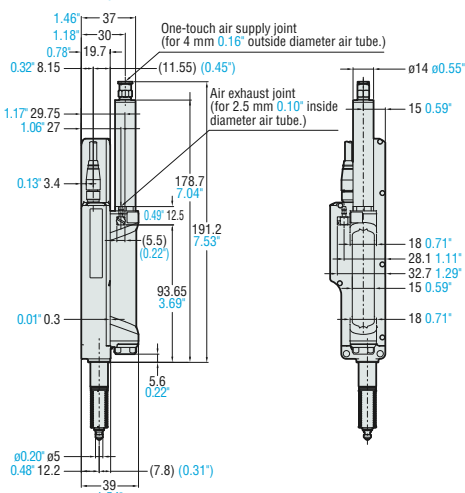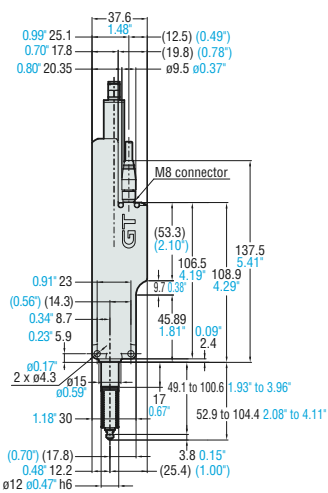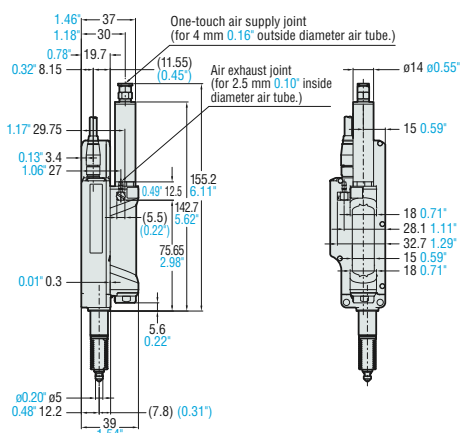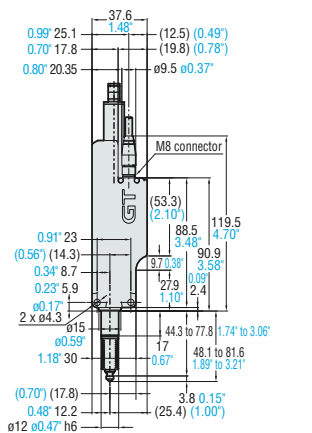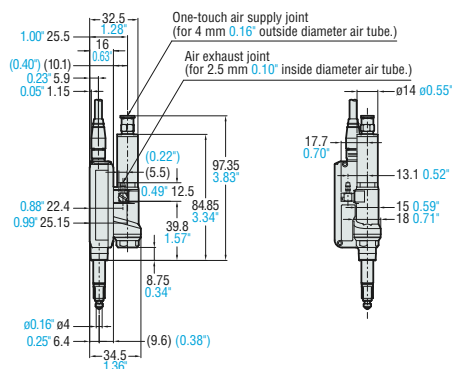

[illegible]




## DIMENSIONS

Amplifier unit  
DIN-rail mount type



GT2-71N/71P/71MCN/71MCP/71CN/71CP

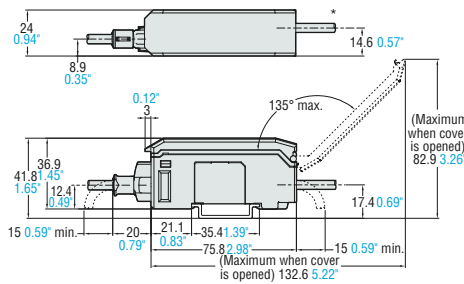


\* Cable specifications

GT2-71N/71P:  $\phi 4.7$   $\phi 0.19$ , 12-core x Brown/Blue: 0.20 mm<sup>2</sup>, Black/White/Gray/Orange/Green/Pink/Purple/Yellow/Red/Pink purple: 0.15 mm<sup>2</sup>, Cable length: 2 m 6.6'  
GT2-72N/72P:  $\phi 4.7$   $\phi 0.19$ , 10-core x Black/White/Gray/Orange/Green/Pink/Purple/Yellow/Red/Pink purple: 0.15 mm<sup>2</sup>, Cable length: 2 m 6.6'


GT2-71MCN/71MCP/71CN/71CP/72CN/72CP

Connector

(connector type/analog output type amplifier unit)




GT2-72N/72P/72CN/72CP

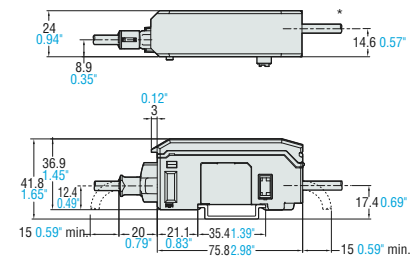

GT2-CA2M/CA10M

Connection cable




\* Cable specifications

Outer diameter:  $\phi 4.7$  mm  $\phi 0.19$ , Cable length: 2 m 6.6' (GT2-CA2M), 10 m 32.8' (GT2-CA10M),  
12-core x Brown/Blue: 0.20 mm<sup>2</sup>, Black/White/Gray/Orange/Green/Pink/Purple/Yellow/Red/  
Pink purple: 0.15 mm<sup>2</sup>

Amplifier unit  
Pulse output



GT2-71D

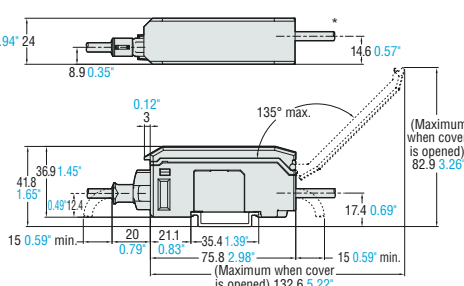


\* Cable specifications

Outer diameter:  $\phi 4.7$  mm  $\phi 0.19$ , Cable length: 2 m 6.6',  
9-core x Brown/Blue/Purple/Pink/Orange/Green/Gray/White/Black: 0.15 mm<sup>2</sup>

Mounting bracket for  
DIN-rail mount type  
amplifier (Optional)  
OP-76877




Material: SUS304




End unit (Optional) (2 pcs.)  
OP-26751



Material: Polycarbonate, Stainless steel



When several units are connected




Number of units	L
1	24 0.94"
2	48 1.89"
3	72 2.83"
4	96 3.78"
5	120 4.72"
6	144 5.67"
7	168 6.61"
8	192 7.56"
9	216 8.50"
10	240 9.45"
11	264 10.39"
12	288 11.34"
13	312 12.28"
14	336 13.23"
15	360 14.17"

Amplifier unit  
Panel mount type



GT2-75N/75P/76N/76P

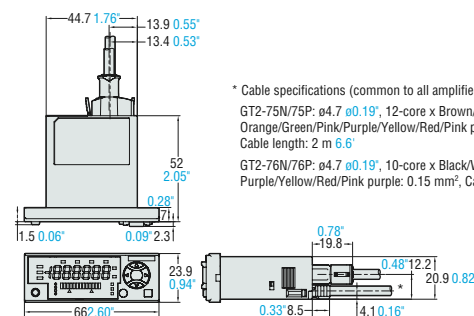

\* Cable specifications (common to all amplifier units)


GT2-75N/75P:  $\phi 4.7$   $\phi 0.19$ , 12-core x Brown/Blue: 0.20 mm<sup>2</sup>, Black/White/Gray/Orange/Green/Pink/Purple/Yellow/Red/Pink purple: 0.15 mm<sup>2</sup>, Cable length: 2 m 6.6'

GT2-76N/76P:  $\phi 4.7$   $\phi 0.19$ , 10-core x Black/White/Gray/Orange/Green/Pink/Purple/Yellow/Red/Pink purple: 0.15 mm<sup>2</sup>, Cable length: 2 m 6.6'


Panel mounting bracket  
(Accessory)  
OP-84394



Panel cutout

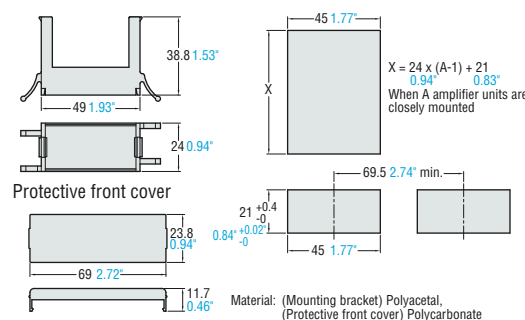

Panel mounting bracket







Amplifier unit  
Large display  
GT2-100N/100P




When the supplied mounting bracket is attached

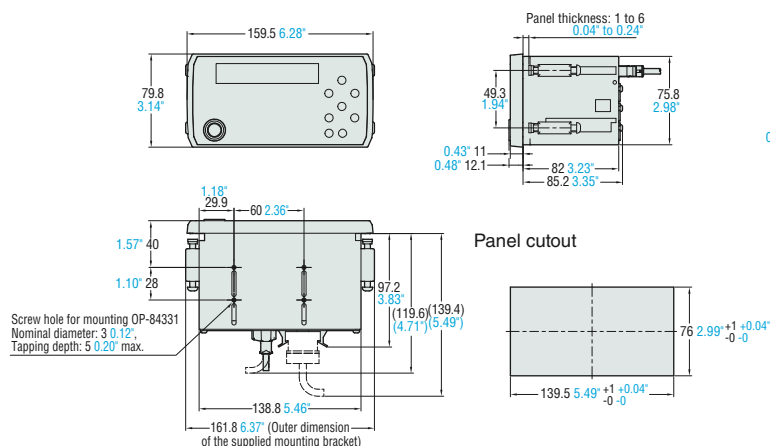


GT2-E3N/E3P Expansion board




When the optional mounting bracket (OP-84331) is used

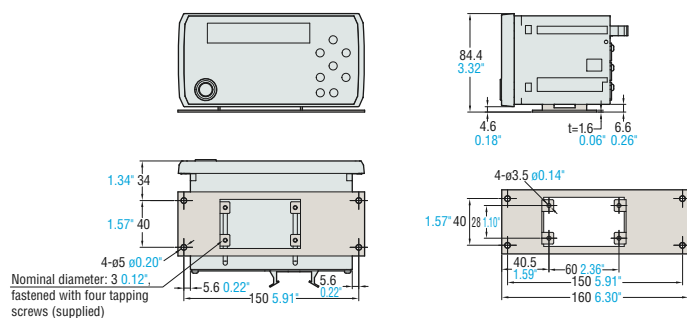


Amplifier unit  
Multi-head type main unit  
GT2-500

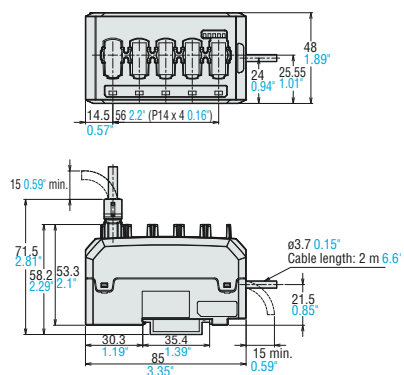

Amplifier unit  
Multi-head type expansion unit  
GT2-550

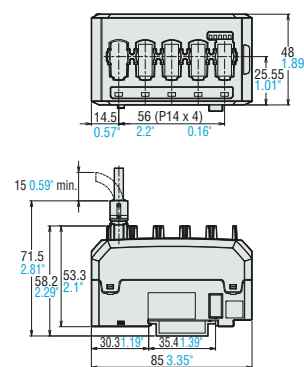


When amplifier units are added

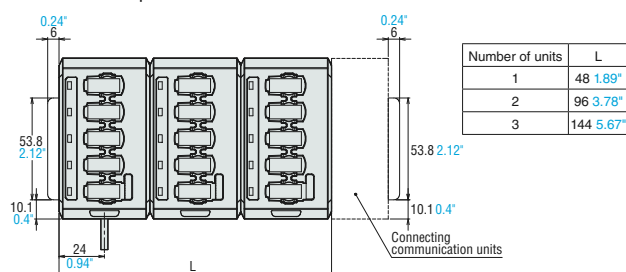





Sensor head mounting bracket A (Optional)  
**OP-76874**

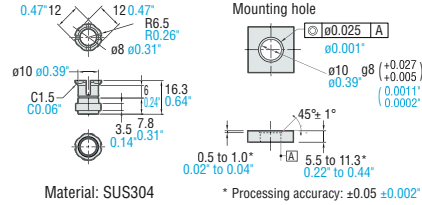


Sensor head cable (straight)/(oil-resistant straight)  
**GT2-CH2M/5M/10M/20M (Optional)/**  
**GT2-CHP2M/5M/10M (Optional)**

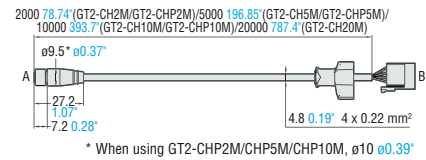

Sensor head mounting bracket C (Optional)  
**OP-84396**

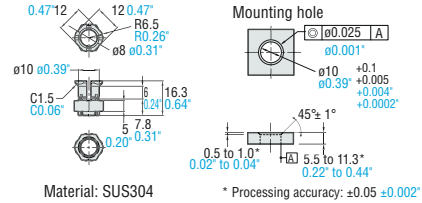


Sensor head cable (L-shaped)  
**GT2-CHL2M/5M/10M/20M (Optional)**

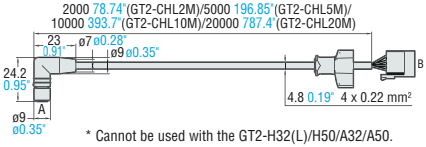


Sensor head mounting bracket B (Optional)  
**OP-76875**



Sensor head mounting bracket E (Optional)  
**OP-87220**



Pin arrangement  
Sensor head cable (straight/L-shaped)




A	B	Casing cover
(1)	(1)	Brown
(2)	(3)	White
(3)	(4)	Blue
(4)	(2)	Black

Dustboot




Sensor head mounting bracket D (Optional)  
**OP-84327**

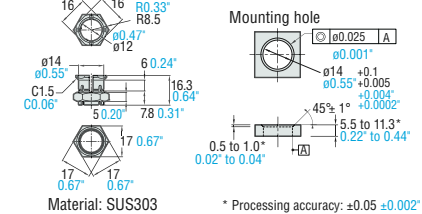

**OP-84332**


Applicable models  
GT2-P12K(F)/P12(F)  
GT2-H12K(F)/H12(F)  
GT2-A12K/A12  
Materials: NBR, SUS304  
\* Attached to the sensor head.  
(Excluding the low stress type)



**OP-87859 (Optional)**

Applicable models  
GT2-P12K(F)/P12(F)  
Materials: Fluorocarbon rubber, SUS304

Sensor head mounting bracket F (Optional)  
**OP-87863**

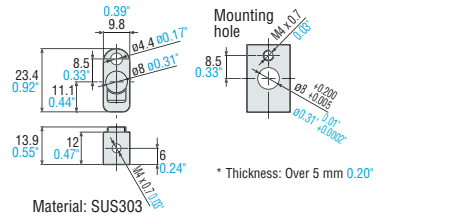


**OP-84459**

Applicable models  
GT2-H32  
GT2-A32  
\* Attached to the sensor head.



**OP-84460**

Applicable models  
GT2-H50  
GT2-A50  
\* Attached to the sensor head.




## Contact

Standard  
**OP-77678**



Standard equipment of the general-purpose sensor head  
GT2-H(A)12(L/F/LF)  
GT2-H(A)32(L)/GT2-H(A)50




Material: SUS304  
SUS40C

Super-tough  
**OP-77682**



Standard equipment of the high-accuracy type sensor head  
GT2-P12K(L/F)  
GT2-H(A)12K(L/F/LF)




Material: SUS304  
Super-tough tungsten alloy

Flat plate (Optional)  
**OP-77679**




Material: SUS304  
Super-tough tungsten alloy



Roller (Optional)  
**OP-77680**




Material: SUS304  
SUS40C



Fluorocarbon resin (Optional)  
**OP-80228**




Material: Fluorocarbon resin (PTFE)



Ceramic (Optional)  
**OP-81970**




Material: SUS304, Ceramic



Needle (Optional)  
**OP-77681**




Material: SUS304  
Super-tough tungsten alloy



Offset (Optional)  
**OP-77683**




Material: SUS304  
Super-tough tungsten alloy



Spacer (Optional)  
**OP-77684**




Material: SUS304



Roller (high-accuracy) (Optional)  
**OP-93332**




Material: SUS304  
SUS303  
SUS40C






## INPUT/OUTPUT CIRCUIT DIAGRAMS


I/O circuit **GT2-71N/72N/71CN/72CN/71MCN/75N/76N**

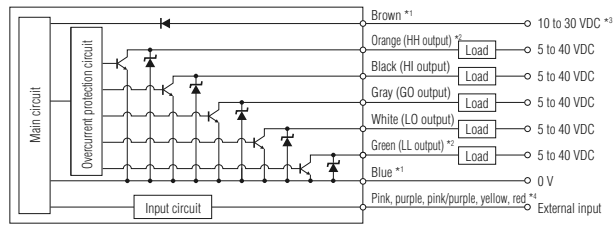


External input circuit

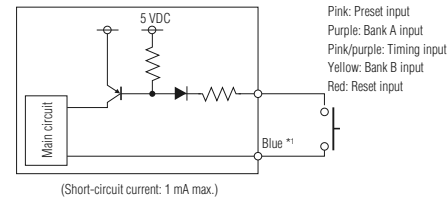

I/O circuit **GT2-71P/72P/71CP/72CP/71MCP/75P/76P**

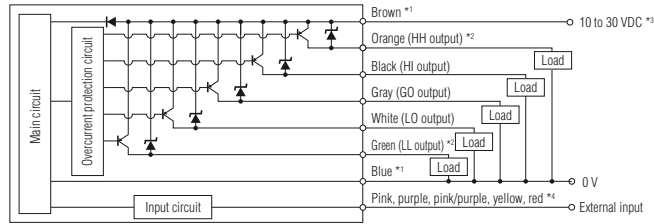

External input circuit

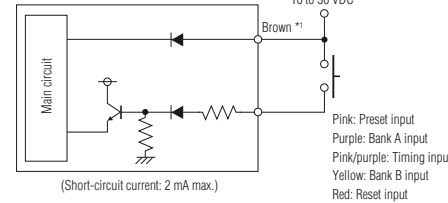

\*1 Brown and blue are applicable only to main units (GT2-71N/71P/71CN/71CP/71MCN/71MCP/75N/75P). Not applicable to expansion units (GT2-72N/72P/72CN/72CP/76N/76P).  
The connector type expansion unit (GT2-72CN/72CP) is not connected to the internal circuit.


\*2 The orange and green wires are used as analog output cables for the analog type amplifier unit (GT2-71MCN/71MCP).

For details, refer to the analog output circuit diagram.

\*3 20 to 30 VDC when expansion unit is connected or for the analog type amplifier unit (GT2-71MCN/71MCP).


\*4 For details on external input, refer to the external input circuit diagram.

Analog output circuit  
**GT2-71MCN/71MCP**

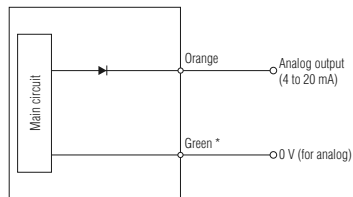


\* The green and blue wires are common internally.

Pulse output amplifier unit **GT2-71D**  
I/O circuit




\* For details of the external input, refer to the diagram of the external input circuit.

External input circuit




Recommended input device

AM26LS32 line receiver or equivalent device




Output circuit of the large display amplifier unit  
**GT2-100N/GT2-E3N**




\* The +/- terminals are provided in the GT2-100N only.  
They are not provided in the GT2-E3N.

Input circuit of the large display amplifier unit  
**GT2-100N/GT2-E3N**




\* The - terminal is provided in the GT2-100N only.  
It is not provided in the GT2-E3N.

Multi-head amplifier unit **GT2-500** (main unit)  
The power supply cable is as follows.




Output circuit of the large display amplifier unit  
**GT2-100P/GT2-E3P**



\* The +/- terminals are provided in the GT2-100P only.  
They are not provided in the GT2-E3P.

Input circuit of the large display amplifier unit  
**GT2-100P/GT2-E3P**



\* The + terminal is provided in the GT2-100P only.  
It is not provided in the GT2-E3P.





CALL  
TOLL  
FREE

TO CONTACT YOUR LOCAL OFFICE  
**1-888-KEYENCE**  
1 - 8 8 8 - 5 3 9 - 3 6 2 3

[www.keyence.ca](http://www.keyence.ca)  
E-mail : [keyencecanada@keyence.com](mailto:keyencecanada@keyence.com)



**SAFETY INFORMATION**

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

CONTACT YOUR NEAREST OFFICE FOR RELEASE STATUS

**KEYENCE CANADA INC.**    **Head Office**    6775 Financial Drive, Suite 202, Mississauga, ON L5N 0A4, Canada    **PHONE:** +1-905-366-7655    **FAX:** +1-905-366-1122

**Montreal Office**    **PHONE:** +1-514-694-4740    **FAX:** +1-514-694-3206

**Windsor Office**    **PHONE:** +1-905-366-7655    **FAX:** +1-905-366-1122

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice.  
Company and product names mentioned in this catalog are either trademarks or registered trademarks of their respective companies.  
The specifications are expressed in metric units. The English units have been converted from the original metric units.  
Copyright (c) 2014 KEYENCE CORPORATION. All rights reserved.

KCN1-1017

GT2pen-KCN-C2-US 1044-3 **612026**